

#### Features

- ◆ Smallest encapsulated 20W converter!  
Ultra compact size: 1.0" x 1.0" x 0.4"
- ◆ Shielded metal case with isolated baseplate
- ◆ Ultrawide 4:1 input voltage ranges
- ◆ Very high efficiency up to 90%
- ◆ Output voltage adjustable
- ◆ Remote On/Off control
- ◆ Operating temp. range  $-40^{\circ}\text{C}$  to  $+75^{\circ}\text{C}$   
and up to  $+85^{\circ}\text{C}$  with heat-sink
- ◆ I/O isolation voltage 1500 VDC
- ◆ Lead free design, RoHS compliant
- ◆ 3-year product warranty



The THL 20WI series is the latest generation of dc-dc converter modules with highest power density. The product achieves 20 Watt output power while it comes in a metal case with dimensions of only 1.0"x 1.0"x 0.4".

All models have an ultra wide 4:1 input voltage range and precisely regulated output voltages. Highest efficiency of up to 90% makes this product very reliable and applicable in temperature ranges of up to  $+75^{\circ}\text{C}$  or  $+85^{\circ}\text{C}$  with optional mounted heat sink. Typical applications are in mobile equipments, instrumentation, distributed power architectures in communication and industrial electronics and everywhere where space on the PCB is critical.

#### Models

Order code	Input voltage range	Output voltage	Output current max.	Efficiency typ.
THL 20-2410WI	9 – 36 VDC (24 VDC nominal)	3.3 VDC	4500 mA	87 %
THL 20-2411WI		5.0 VDC	4000 mA	89 %
THL 20-2412WI		12 VDC	1670 mA	89 %
THL 20-2413WI		15 VDC	1340 mA	89 %
THL 20-2415WI		24 VDC	835 mA	88 %
THL 20-2422WI		$\pm 12$ VDC	$\pm 835$ mA	89 %
THL 20-2423WI		$\pm 15$ VDC	$\pm 670$ mA	89 %
THL 20-4810WI		18 – 75 VDC (48 VDC nominal)	3.3 VDC	4500 mA
THL 20-4811WI	5.0 VDC		4000 mA	89 %
THL 20-4812WI	12 VDC		1670 mA	89 %
THL 20-4813WI	15 VDC		1340 mA	90 %
THL 20-4815WI	24 VDC		835 mA	88 %
THL 20-4822WI	$\pm 12$ VDC		$\pm 835$ mA	89 %
THL 20-4823WI	$\pm 15$ VDC		$\pm 670$ mA	89 %

### Input Specifications

Input current at no load (at nominal input voltage)	24 V single output models: 24 V dual output models: 48 V single output models: 48 V dual output models:	80 mA typ. 40 mA typ. 40 mA typ. 25 mA typ.
Input current at full load (at nominal input voltage)	24 V; 3.3 VDC models: 24 V; other models: 48 V; 3.3 VDC models: 48 V; other models:	700 mA typ. 940 mA typ.. 350 mA typ. 470 mA typ.
Start-up voltage	24 V models: 48 V models:	9 VDC (or lower) 18 VDC (or lower)
Surge voltage (1 sec. max.)	24 Vin models: 48 Vin models:	50 V max. 100 V max.
Reflected input ripple current	24 V models: 48 V models:	50 mA <sub>p-p</sub> typ. 30 mA <sub>p-p</sub> typ.
Conducted noise (input)		EN 55022 class A, FCC part 15, level A with external components (see application note)
Recommended input fuse (slow blow)	24 V models: 48 V models:	5000 mA 2500 mA

### Output Specifications

Voltage set accuracy		±1 %
Output voltage adj. range		±10 % for single output models only. Trim up via resistor over Trim and -Vout Trim down via resistor over Trim and +Vout (Resistor values tba, 0 Ohm=max. adjustment)
Regulation	- Input variation (Vmin – Vmax) - Load variation	single output models: 0.2 % max. dual output models: 0.5 % max. single output models: 0.5 % max. (0 – 100 % load) dual output models: 1.0 % max. (8 – 100 % balanced load)
Minimum load	single output models: dual output models:	not required 8 % of rated max current (operation at lower load condition will not damage the converters. However, they may not meet all listed specifications)
Ripple and noise (20 MHz bandwidth)	3.3 & 5.0 VDC models: 12 & 15 VDC models: 24 VDC models:	75 mV <sub>p-p</sub> typ. 100 mV <sub>p-p</sub> typ. 150 mV <sub>p-p</sub> typ. Measured with a 1µF M/C and a 10µF T/C
Temperature coefficient		±0.02 %/K
Output current limitation		at 150 % of Iout max., foldback
Short circuit protection		indefinite, automatic recovery
Transient response setting time		300 µs typ. (25% load step change)
Max. capacitive load	3.3 VDC models: 5 VDC models: 12 VDC models: 15 VDC models: 24 VDC models: ±12 VDC models: ±15 VDC models:	10'300 µF 6'800 µF 1'200 µF 750 µF 300 µF 680 µF (each output) 380 µF (each output)

## General Specifications

Temperature ranges	<ul style="list-style-type: none"> <li>- Operating (convection cooling 50 LFM, 0.25 m/s)</li> <li>- Operating with heat sink (natural convection 20 LFM)</li> <li>- Case temperature</li> <li>- Storage</li> </ul>	<ul style="list-style-type: none"> <li>-40°C to +75°C (with derating)</li> <li>-40°C to +85°C (with derating)</li> <li>+105°C max.</li> <li>-50°C to +125°C</li> </ul>
Load derating (convection cooling 50 LFM, 0.25 m/s)	<ul style="list-style-type: none"> <li>- without heat sink</li> <li style="padding-left: 20px;">24 V; 3.3 VDC models:</li> <li style="padding-left: 20px;">48 V; 3.3 VDC models:</li> <li style="padding-left: 20px;">5, 12 &amp; 15 VDC single output models:</li> <li style="padding-left: 20px;">24 VDC output models:</li> <li style="padding-left: 40px;">dual output models:</li> <li>- with heat sink</li> <li style="padding-left: 20px;">24 V; 3.3 VDC models:</li> <li style="padding-left: 20px;">48 V; 3.3 VDC models:</li> <li style="padding-left: 20px;">5, 12 &amp; 15 VDC output models:</li> <li style="padding-left: 20px;">24 VDC output models:</li> <li style="padding-left: 40px;">dual output models:</li> </ul>	<ul style="list-style-type: none"> <li>2.5 %/K above +64°C</li> <li>2.7 %/K above +68°C</li> <li>2.2 %/K above +60°C</li> <li>2.0 %/K above +55°C</li> <li>2.2 %/K above +60°C</li> <li>3.3 %/K above +70°C</li> <li>3.2 %/K above +74°C</li> <li>3.1 %/K above +67°C</li> <li>2.7 %/K above +63°C</li> <li>3.1 %/K above +67°C</li> </ul>
Thermal inpedance	<ul style="list-style-type: none"> <li>- Natural convection</li> <li>- Natural convection with heat sink</li> </ul>	<ul style="list-style-type: none"> <li>18.2°C/W</li> <li>15.8°C/W</li> </ul>
Humidity (non condensing)		95 % rel H max.
Reliability, calculated MTBF (MIL-HDBK-217F, at +25°C, ground benign)		>346'000 h
Isolation voltage (60sec.)	- Input/Output	1500 VDC
Isolation capacitance	- Input/Output	1500 pF typ.
Isolation resistance	- Input/Output (500 VDC)	>1000 MOhm
Remote On/Off	<ul style="list-style-type: none"> <li>- On:</li> <li>- Off:</li> <li>- Off idle current:</li> </ul>	<ul style="list-style-type: none"> <li>3.5 ... 15 VDC or open circuit</li> <li>0 ... 1.2 VDC or short circuit pin 6 and pin 2</li> <li>8 mA</li> </ul>
Switching frequency (fixed)		330 kHz typ. (pulse width modulation PWM)
Altitude during operation		5'000 m max. (16400 ft) approved
Safety standards (designed to meet)		UL/cUL 60950-1, IEC/EN 60950-1
Safety approvals	<ul style="list-style-type: none"> <li>- CB test certificate according IEC 60950-1</li> <li>- CSA certificate for UL/cUL 60950-1</li> </ul>	<a href="http://www.tracopower.com/products/thl20wi-cb.pdf">www.tracopower.com/products/thl20wi-cb.pdf</a> <a href="http://www.tracopower.com/products/thl20wi-csa.pdf">www.tracopower.com/products/thl20wi-csa.pdf</a>
Environmental compliance	<ul style="list-style-type: none"> <li>- Reach</li> <li>- RoHS</li> </ul>	<a href="http://www.tracopower.com/products/thl20wi-reach.pdf">www.tracopower.com/products/thl20wi-reach.pdf</a> RoHS directive 2002/95/EC


## Physical Specifications

Casing material	metal
Baseplate	non conductive FR4
Potting material	epoxy (UL 94V-0 rated)
Weight	15 g (0.53 oz)
Soldering temperature	max. 260°C / 10sec.

**Application note :** [www.tracopower.com/products/thl20wi-application.pdf](http://www.tracopower.com/products/thl20wi-application.pdf)

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

**Outline Dimensions**

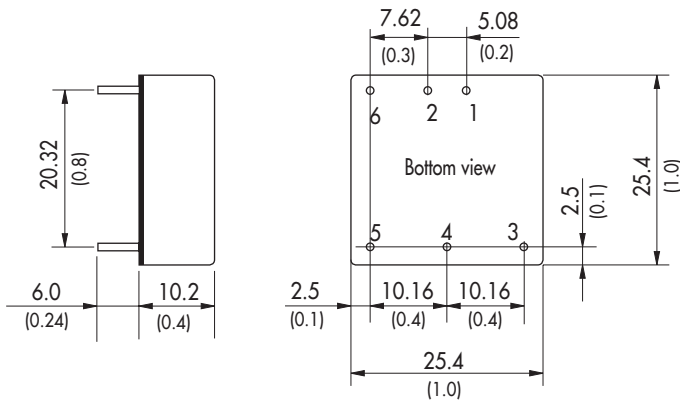

Pin-Out		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
3	+Vout	+Vout
4	Trim	Common
5	-Vout	-Vout
6	Remote On/Off	



Dimensions in [mm], ( ) = Inch  
 Pin diameter  $\varnothing$  1.0 (0.04)  
 Pin pitch tolerances:  $\pm 0.25$  ( $\pm 0.01$ )  
 Tolerances:  $\pm 0.5$  ( $\pm 0.02$ )

**Heat-Sink (Option)**

**Order code:** THL-HS1  
 (cont.: heat-sink, thermal pad, 2 clamps)  
**Material:** Aluminum  
**Finish:** Anodic treatment (black)  
**Weight:** 4 g (0.14 oz) without converter  
 Thermal impedance after assembling: 15.8 K/W



**Note:**  
 The product label on converter has to be removed before mounting the heat-sink.  
 For volume orders converters will be supplied with heat-sink already mounted. Please contact factory for quotation.  
 Separate heat-sinks are only available for prototypes and small quantity orders.

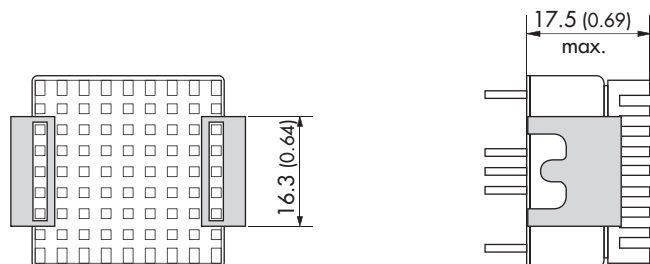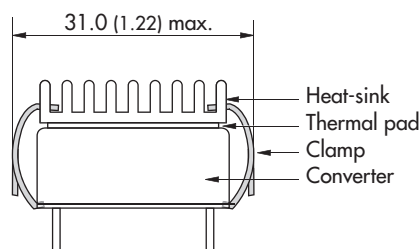

Specifications can be changed any time without notice.