


### Features

- ◆ Highest power density in SIP package
- ◆ Wide 4:1 input voltage range
- ◆ Ultra-compact SIP-8 package
- ◆ Smallest footprint 6W converter
- ◆ Full SMD design
- ◆ Temperature range  $-40^{\circ}$  to  $+71^{\circ}\text{C}$
- ◆ High efficiency up to 88%
- ◆ Indefinite short-circuit protection
- ◆ I/O isolation 1500 VDC
- ◆ Remote On/Off control
- ◆ Fully RoHS compliant
- ◆ 3-year product warranty

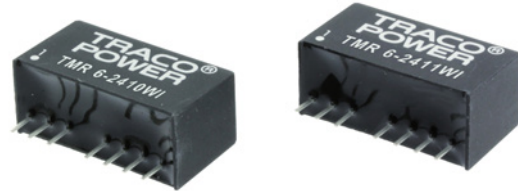

The TMR-6WI series is a new family of isolated 6W dc-dc converter modules with regulated output, featuring wide 4:1 input voltage ranges. The product comes in a ultra-compact SIP-8 plastic package with a small footprint occupying only 2.0 cm<sup>2</sup> (0.3 square in.) of board space.

An excellent efficiency allows  $-40^{\circ}$  to  $+71^{\circ}\text{C}$  operation temperatures. Further features include remote On/Off control and continuous short circuit protection. The very compact dimensions of these converters make them an ideal solution for many space critical applications in communication equipment, instrumentation and industrial electronics.

### Models

Order code	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TMR 6-2410WI	9.0 – 36 VDC (24 VDC nominal)	3.3 VDC	1500 mA	81 %
TMR 6-2411WI		5 VDC	1200 mA	84 %
TMR 6-2419WI		9 VDC	666 mA	86 %
TMR 6-2412WI		12 VDC	500 mA	87 %
TMR 6-2413WI		15 VDC	400 mA	88 %
TMR 6-2415WI		24 VDC	250 mA	87 %
TMR 6-2421WI		$\pm 5$ VDC	$\pm 600$ mA	84 %
TMR 6-2422WI		$\pm 12$ VDC	$\pm 250$ mA	87 %
TMR 6-2423WI		$\pm 15$ VDC	$\pm 200$ mA	87 %
TMR 6-4810WI		18 – 75 VDC (48 VDC nominal)	3.3 VDC	1500 mA
TMR 6-4811WI	5 VDC		1200 mA	84 %
TMR 6-4819WI	9 VDC		666 mA	85 %
TMR 6-4812WI	12 VDC		500 mA	87 %
TMR 6-4813WI	15 VDC		400 mA	87 %
TMR 6-4815WI	24 VDC		250 mA	87 %
TMR 6-4821WI	$\pm 5$ VDC		$\pm 600$ mA	84 %
TMR 6-4822WI	$\pm 12$ VDC		$\pm 250$ mA	87 %
TMR 6-4823WI	$\pm 15$ VDC		$\pm 200$ mA	87 %



**General Specifications**


Reliability, calculated MTBF (MIL-HDBK-217F, at +25°C, ground benign)	>800'000 Mio h
Isolation voltage (60sec.) – Input/Output	1500 VDC
Isolation capacitance – Input/Output	50 pF max.
Isolation resistance – Input/Output (500 VDC)	>1 GOhm
Switching frequency	522 kHz min. (PWM)
Remote On/Off	– On: open or high impedance – Off: 2...4 mA current applied via 1KOhm resistor – Off stand by input current 1.0 mA typ.
Safety standards	IEC/EN 60950-1, UL 60950-1
Altitude during operation	4'000 m max. (13'120 ft) approved
Environmental compliance	– Reach <a href="http://www.tracopower.com/products/tmr6wi-reach.pdf">www.tracopower.com/products/tmr6wi-reach.pdf</a> – RoHS RoHS directive 2011/65/EU

**Physical Specifications**

Casing material	non-conductive plastic
Potting material	silicon, (UL 94V-0 rated)
Weight	4.8 g (0.17oz)

**Application note:** [www.tracopower.com/products/tmr6wi-application.pdf](http://www.tracopower.com/products/tmr6wi-application.pdf)

**Outline Dimensions**

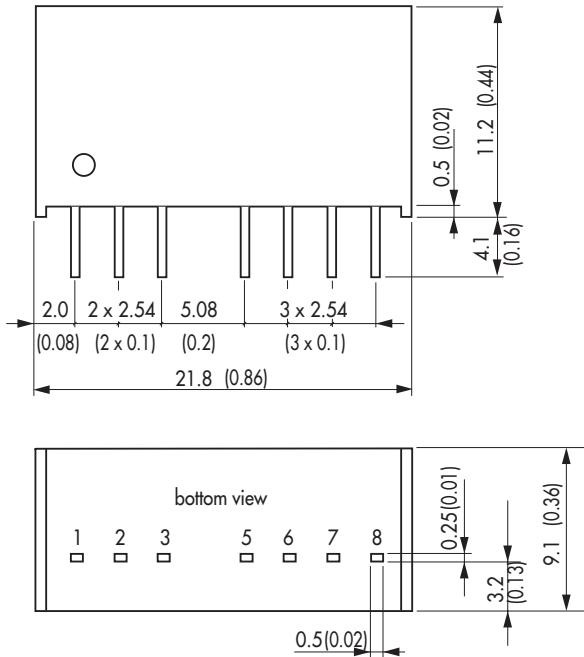

Pin-Out		
Pin	Single	Dual
1	-Vin (GND)	-Vin (GND)
2	+Vin (Vcc)	+Vin (Vcc)
3	Remote On/Off	Remote On/Off
5	No function	No function
6	+Vout	+Vout
7	-Vout	Common
8	No function	-Vout

Dimensions in [mm], ( ) = Inch  
Tolerances: ±0.5 (±0.02)  
Pin pitch tolerances: ±0.25 (±0.01)

Specifications can be changed any time without notice.

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at [www.tracopower.com](http://www.tracopower.com)