

1.0 SCOPE

This specification documents the detail requirements for space qualified die manufactured on Analog Devices, Inc.'s QML certified line per MIL-PRF-38534 class K except as modified herein.

The manufacturing flow described in the STANDARD DIE PRODUCTS PROGRAM brochure at <http://www.analog.com/aerospace> is to be considered a part of this specification.

This data sheet specifically details the space grade version of this product. A more detailed operational description and a complete datasheet for commercial product grades can be found at www.analog.com/REF02

2.0 Part Number. The complete part number(s) of this specification follow:


<u>Part Number</u>	<u>Description</u>
REF02-000C	+5V Precision Voltage Reference / Temperature Transducer
REF02R000C	Radiation tested +5V Precision Voltage Reference

3.0 Die Information

3.1 Die Dimensions

Die Size	Die Thickness	Bond Pad Metalization
48 mil x 74 mil	19 mil \pm 2 mil	Al/Cu

3.2 Die Picture

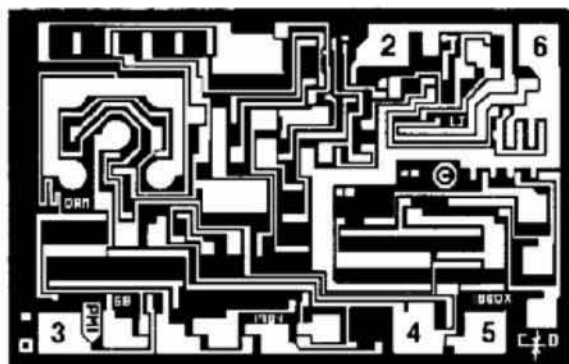

1. NC
2. V_{IN}
3. TEMP
4. GND
5. TRIM
6. V_{OUT}
7. NC
8. NC

3.3 Absolute Maximum Ratings 1/

Input Voltage (V_{IN})	40V dc
Output Short Circuit Duration	Indefinite
Storage Temperature	-65°C to +150°C
Ambient Operating Temperature Range (T_A)	-55°C to +125°C

Absolute Maximum Ratings Notes:

- 1/ Stresses above the absolute maximum rating may cause permanent damage to the device. Extended operation at the maximum levels may degrade performance and affect reliability.

4.0 Die Qualification

In accordance with class-K version of MIL-PRF-38534, Appendix C, Table C-II, except as modified herein.

- (a) Qual Sample Size and Qual Acceptance Criteria – 25/2
- (b) Qual Sample Package – DIP
- (c) Pre-screen test post assembly required prior to die qualification, to remove all assembly related rejects.

Table I - Dice Electrical Characteristics

Parameter	Symbol	Conditions <u>1/</u>	Limit Min	Limit Max	Units
Quiescent Supply Current	I_{SY}	No Load		1.4	mA
Output Adjustment Range	ΔV_{TRIM}	$R_P = 10k\Omega$	± 3.0		%
Output Voltage	V_O	$I_L = 0mA$	4.985	5.015	V
Line Regulation	LN_{reg}	$V_{IN} = 8V$ to 33V		0.010	%/V

Table I Notes:

1. $V_{IN} = 15V$, $T_A = 25^\circ C$, unless otherwise specified.

Table II - Electrical Characteristics for Qual Samples

Parameter	Symbol	Conditions <u>1/</u>	Sub- groups	Limit Min	Limit Max	Units
Quiescent Supply Current	I_{SY}	No Load <u>M, D, L, R</u> <u>5/</u>	1		1.4	mA
			2, 3		2.0	
			1		1.4	
Output Adjustment Range <u>6/</u>	ΔV_{TRIM}	$R_P = 10k\Omega$	1	± 3.0		%
Output Voltage	V_O	$I_L = 0mA$ <u>M, D, L, R</u> <u>5/</u>	1	4.985	5.015	V
			2, 3	4.978	5.022	
			1	4.975	5.025	
Short Circuit Current <u>6/</u>	I_{OS}	$V_O = 0V$	1	+15	+60	mA
Sink Current <u>6/</u>	I_S		1	-0.3		mA
Load Regulation <u>2/</u>	LD_{reg}	$I_L = 0mA \text{ to } 10mA$ <u>M, D, L, R</u> <u>5/</u>	1		0.010	%/mA
			1		0.015	
		$I_L = 0mA \text{ to } 8mA$	2, 3		0.012	
Line Regulation <u>2/</u>	LN_{reg}	$V_{IN} = 8V \text{ to } 33V$ <u>M, D, L, R</u> <u>5/</u>	1		0.010	%/V
			2, 3		0.015	
			1		0.030	
Load Current <u>6/</u>	I_L	<u>3/</u>	1	10		mA
Output Voltage Temperature Coefficient <u>6/</u>	TCV_O	<u>4/</u>	8		± 15	ppm/ $^{\circ}C$

Table II Notes:

1. $V_{IN} = 15V$, unless otherwise specified.
2. Line and Load Regulation specifications include effect of self heating.
3. Minimum of 10mA Load Current guaranteed by Load Regulation test.
4. $TCV_O = ABS (V_{MAX} - V_{MIN}) / (5V * 180^{\circ}C * 10^{-6})$ where $-55^{\circ}C \leq T_A \leq 125^{\circ}C$.
5. Radiation tested to 100Krad.
6. Not tested post irradiation.

Table III - Life Test Endpoint and Delta Parameter
(Product is tested in accordance with Table II with the following exceptions)

Parameter	Symbol	Sub-groups	Post Burn In Limit		Post Life Test Limit		Life Test Delta	Units
			Min	Max	Min	Max		
Output Voltage	V _O	1	4.979	5.021	4.973	5.027	±0.006	V
		2, 3			4.966	5.034		

5.0 Life Test/Burn-In Information

- 5.1** HTRB is not applicable for this drawing.
- 5.2** Burn-in is per MIL-STD-883 Method 1015 test condition B or C.
- 5.3** Steady state life test is per MIL-STD-883 Method 1005.

Rev	Description of Change	Date
A	Initiate	20-DEC-01
B	Update web address. Add radiation part number and limits.	May 29, 2003